


PRODUCT INFORMATION PACKET



Model No: 3091
Catalog No: 3091
1/3 HP Fan & Blower Motor, 1075 RPM, 2 Speed, 208-230 Volts, 48 Frame, OAO
Direct Drive Motors

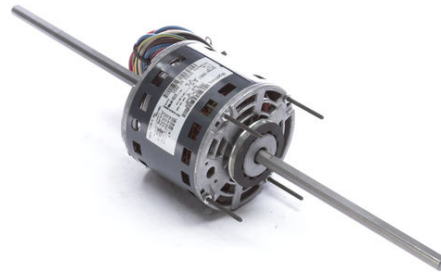

Regal and Genteq are trademarks of Regal Beloit Corporation or one of its affiliated companies.
©2019 Regal Beloit Corporation, All Rights Reserved. MC017097E






Nameplate Specifications

Output HP	1/3 Hp	Frequency	60 Hz
Voltage	208-230 V	Current	2.40 A
Speed	1075 rpm	Service Factor	1
Phase	1	Duty	Continuous Air Over
Insulation Class	B	Frame	48
Enclosure	Open Air Over	Thermal Protection	Thermally Protected
Ambient Temperature	40 °C	UL	Recognized
CSA	Y	CE	N

Technical Specifications

Electrical Type	Permanent Split Capacitor	Poles	6
Rotation	Counterclockwise	Mounting	Resilient Base
Motor Orientation	Any	Drive End Bearing	Sleeve
Opp Drive End Bearing	Sleeve	Frame Material	Rolled Steel
Shaft Type	Flat	Overall Length	22.00 in
Frame Length	4.82 in	Shaft Diameter	0.500 in
Shaft Extension	6.50 in	Thru-bolts Extension	1.50 in

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:25/10/2019



THIRD ANGLE PROJECTION

REVISIONS

REV

DESCRIPTION



DATE

APPROVED

2 UPDATED PER ISO9-5194 12/03/09 NT

NP24X327716

SIZE A

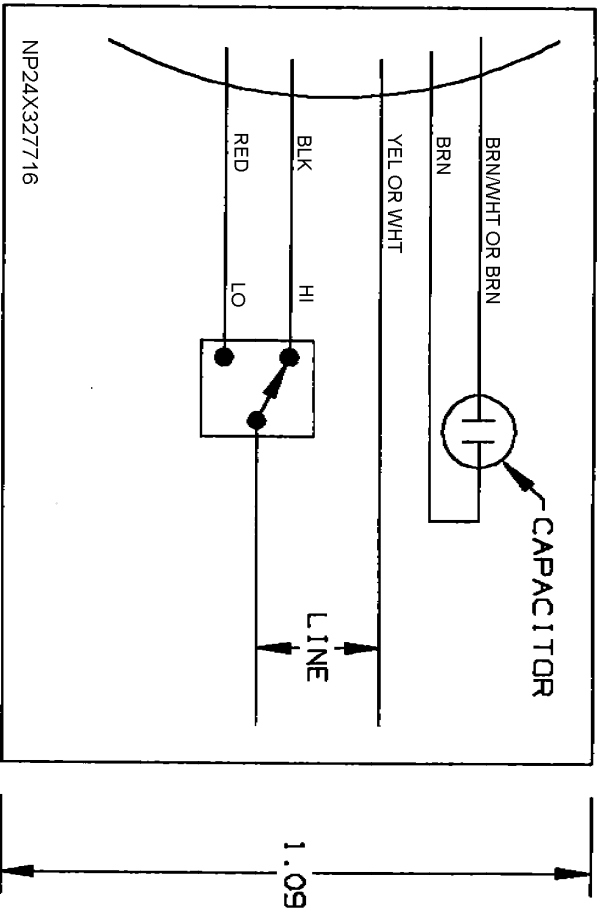

NOTE: THIS DRAWING WILL BE ELECTRONICALLY REPRODUCED BY THE HVAC FAN MOTOR NAMEPLATE SYSTEM.

UNLESS OTHERWISE SPECIFIED	SIGNATURES	DATE
DIMENSIONS ARE IN INCHES	DRAWN <i>[Signature]</i>	11-1-94
TOLERANCES ON:	CHECKED	
2 PL. DECIMALS ±	ENGRS	
3 PL. DECIMALS ±	ISSUED	
ANGLES ±		
FRACTIONS ±		
MATERIAL:		



REGAL-BELOIT CORPORATION

NAMEPLATE LABEL

#PLD PRACTICES:	CAD NO.

SIZE	FSCM NO	DWG NO
A		NP24X327716
SCALE	3	SHEET
		1 OF 1

F 30 · VMD7

DISTR TO