PRODUCT INFORMATION PACKET



Modal No: 5KC36MN27X Catalog No: C133 1/2,1725,DP,48,1/60/115/230 Open Drip Proof (ODP)



Regal and Marathon are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2017 Regal Beloit Corporation, All Rights Reserved. MC017097E





Nameplate Specifications

Output HP	0.5 Hp	Output KW	0.37 kW	
Frequency	60 Hz	Voltage	115/230 V	
Current	8.2,4.1 A	Speed	1725 rpm	
Service Factor	1	Phases	1	
Efficiency	62 %	Duty	CONT	
Insulation Class	В	KVA Code	К	
Frame	48	Enclosure	DP	
Overload Protector	AUTO	Ambient Temperature	40 °C	
Drive End Bearing Size	6203	Opp Drive End Bearing Size	6203	
UL	Recognized	CSA	Yes	
CE	N			

Technical Specifications

Electrical Type	trical Type Capacitor start(CSIR)		SM
Poles	4	Rotation	ccw/cw
Mounting	RB	Motor Orientation	ANY
Drive End Bearing	BALL	Opp Drive End Bearing	BALL
Frame Material	Rolled Steel	Overall Length	10 in
Frame Length	6.22 in	Shaft Diameter	0.5 in
Shaft Extension	1.5 in		

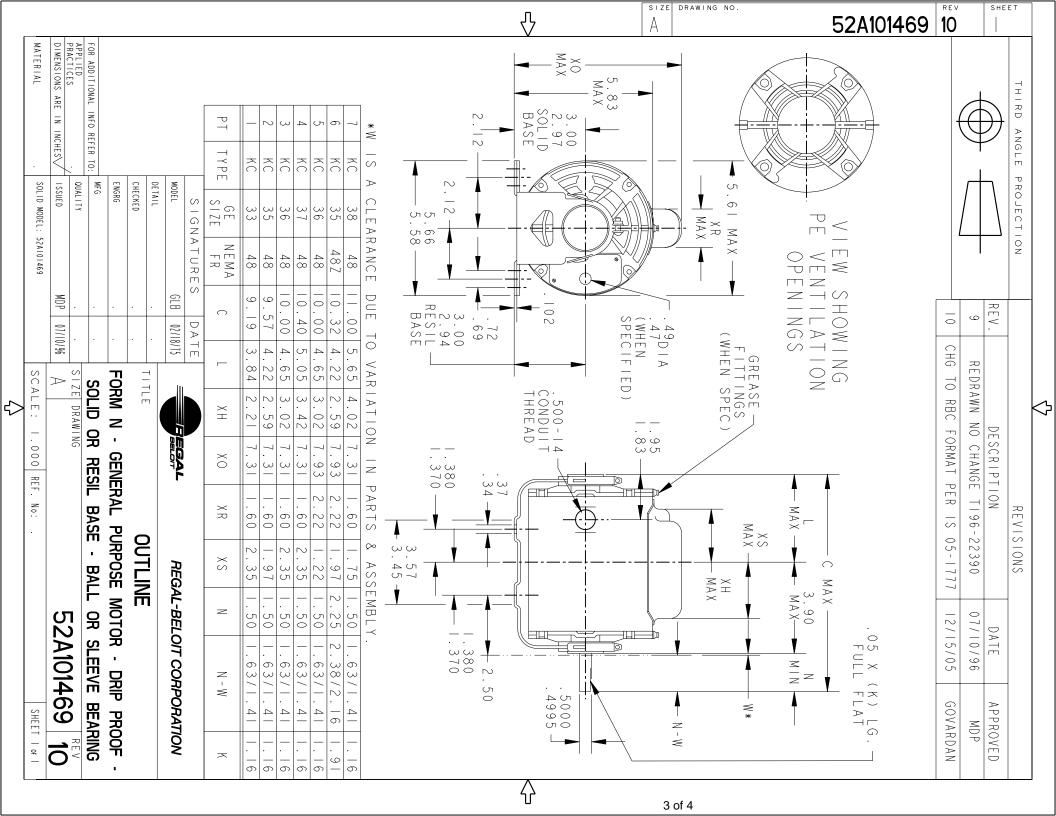

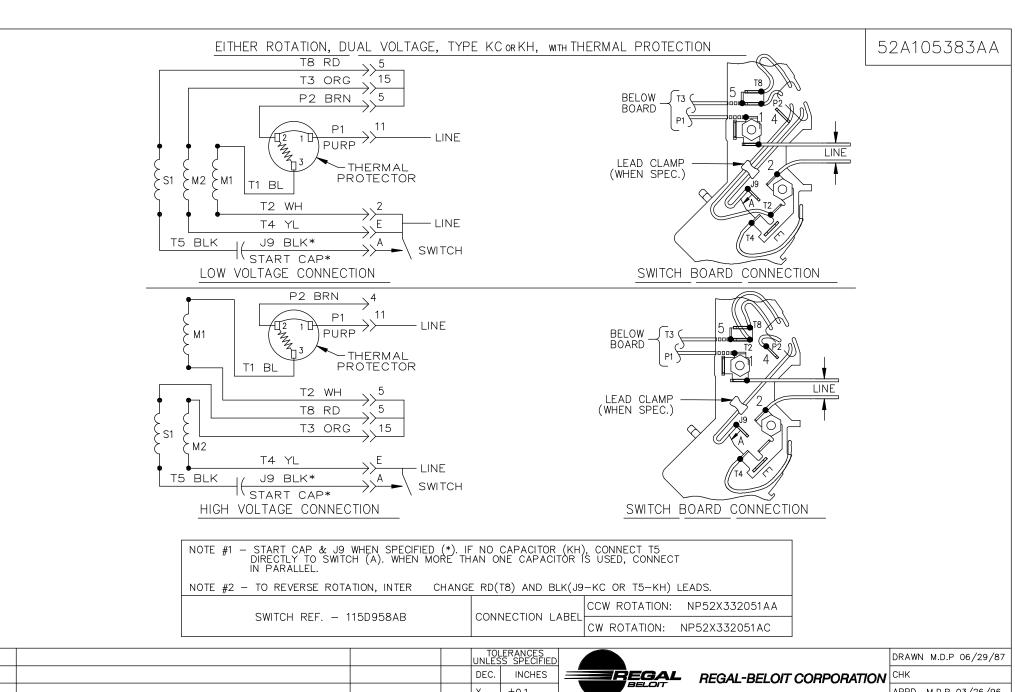

				UNLES	S SPECIFIED		DRAWN M.D.P 06/29/87
				DEC.	INCHES	REGAL REGAL-BELOIT CORPORATION	CHK
				.X	±0.1		APPD M.D.P 03/26/96
				.xx	±0.02	TITLE CONNECTION DIAGRAM	SCALE 1=1
5	ADDED CONNECTION LABEL PER ECO-0030779	UD 02/06/13	PKG	.xxx	±0.005	30 FRAME SWITCH REDESIGN	REF
4	UPDATED PER IS07-0150	MD 01/23/07		.xxxx	±0.0005	MAT'L.	FMF
N	REVISION	BY & DATE	СНК	ANG	±1.0	FINISH 4 of 4	PREV