PRODUCT INFORMATION PACKET

genteq®

Model No: 3288 Catalog No: 3288

1/2 HP OEM Replacement Motor, 1075 RPM, 200-230/460 Volts, 48 Frame, OAO

HVAC/R OEM Replacement Motors





Regal and Genteq are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2019 Regal Beloit Corporation, All Rights Reserved. MC017097E

Product Information Packet: Model No: 3288, Catalog No:3288 1/2 HP OEM Replacement Motor, 1075 RPM, 200-230/460 Volts, 48 Frame, OAO



Nameplate Specifications


Output HP	1/2 Hp	Frequency	60 Hz
Voltage	200-230/460 V	Current	4.60/ 2.30 A
Speed	1075 rpm	Service Factor	1
Phase	1	Duty	Continuous Air Over
Insulation Class	В	Frame	48
Enclosure	Open Air Over	Thermal Protection	Thermally Protected
Ambient Temperature	40 °C	UL	Recognized

Technical Specifications

Electrical Type	Permanent Split Capacitor	Poles	6
Rotation	Reversible	Mounting	Lug
Motor Orientation	Vertical Shaft Up	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Flat	Overall Length	9.56 in
Frame Length	5.82 in	Shaft Diameter	0.500 in
Shaft Extension	3.00 in		

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:25/10/2019

REVISIONS DESCRIPTION

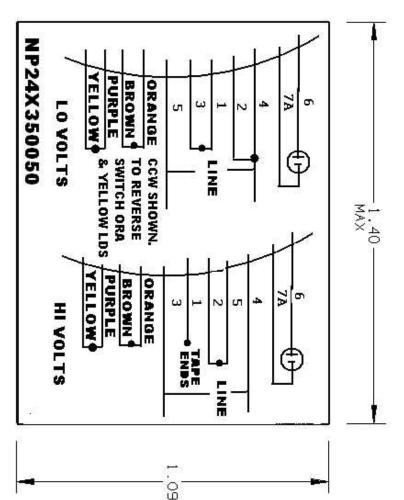

3 of 3

TYPE FACE: COLORS OR NUMBERS DENOTING LEAD IDENTIFICATION AND N.P. NUMBER ARE TO BE 18 POINT NEWS GOTHIC CONDENSED. OTHER INFORMATION SHOULD BE 18 POINT IF SPACE ALLOWS, OTHERWISE USE 14 POINT.

⇧

MATERIALS: Ţ-MIL WHITE VINYL ADHESIVE STOCK 33 SPEC ASDEG41-ST

BLACK INK GE SPEC ASOFM48

NOTE: THE BOX LINES AND DIMENSIONS REPRESENT THE SIZE OF THE TAPE TO BE USED. DO NOT INCLUDE THESE IN STAMP FORMAT.



REGAL-BELOIT CORPORATION

CONNECTION DIAGRAM

NP24X350050

RAMJ

11/28/07

4>

ON