## PRODUCT INFORMATION PACKET

genteq®

Model No: 3925 Catalog No: 3925

1/2 HP OEM Replacement Motor, 1140 RPM, 200-230/460 Volts, 48 Frame, OAO

**HVAC/R OEM Replacement Motors** 





Regal and Genteq are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2019 Regal Beloit Corporation, All Rights Reserved. MC017097E

Product Information Packet: Model No: 3925, Catalog No:3925 1/2 HP OEM Replacement Motor, 1140 RPM, 200-230/460 Volts, 48 Frame, OAO



## Nameplate Specifications

Output HP	1/2 Hp	Frequency	60 Hz
Voltage	200-230/460 V	Current	3.40/ 1.70 A
Speed	1140 rpm	Service Factor	1
Phase	1	Duty	Continuous Air Over
Insulation Class	В	Frame	48
Enclosure	Open Air Over	Thermal Protection	Thermally Protected
Ambient Temperature	40 °C	UL	Recognized
CSA			

## **Technical Specifications**


Electrical Type	Permanent Split Capacitor	Poles	6	
Rotation	Reversible	Mounting	Lug	
Motor Orientation	Vertical Shaft Up	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel	
Shaft Type	Flat	Overall Length	10.89 in	
Frame Length	5.32 in	Shaft Diameter	0.500 in	
Shaft Extension	4.00 in			

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:25/10/2019

RE -

Convert to REC Format JAR 19 2005



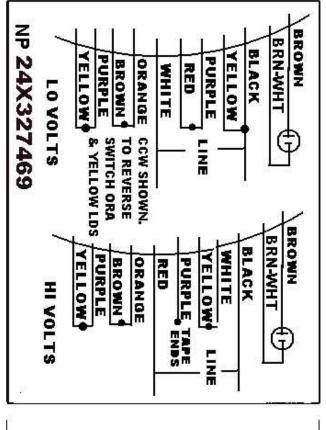

9

<del>3 of 3</del>

TYPE FACE: COLORS OR NUMBERS DENOTING LEAD IDENTIFICATION AND N.P. NUMBER ARE TO BE 18 POINT NEWS GOTHIC CONDENSED. OTHER INFORMATION SHOULD BE 18 POINT IF SPACE ALLOWS, OTHERWISE

⇧

14 POINT

MATERIALS: T-MIL WHITE VINYL ADHESIVE STOCK 33 SPEC ASDEG41-ST

BLACK INK GE SPEC ASOFM48

NOTE: THE BOX LINES AND DIMENSOF THE TAPE TO BE USED.
IN STAMP FORMAT. DIMENSIONS REPRESENT THE SIZE USED. DO NOT INCLUDE THESE



REGAL-BELOIT CORPORATION

CONNECTION DIAGRAM

Ę 24X327469

4-84

ON